



# Dialight<sup>®</sup> LED High Output High Bay - Low Profile

Technical Specification Sheet - EMEA

JANUARY 2023


### Vigilant® LED High Output High Bay - Low Profile

**Standard Models** 



#### **Certifications & Ratings**

- 10 year warranty
- CE / RCM / ENEC
- IP66/67
- IK10 (polycarbonate) / IK06 (glass)
- L70 > 150,000 hours
- Factory installed secondary retention bracket, optional safety cable accessory available

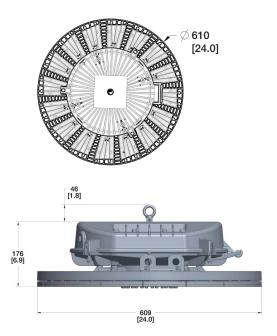

Dimensions in mm [inches]

Mechanical Information	ion:					
Weight (120-277 VAC):	21.8 kg (48 lbs)					
Weight (415 VAC):	22.2 kg (49 lbs)					
Shipping weight:	28.1 kg (62 lbs)					
Mounting:	(1) Loop					
Wiring entries:	(2) M25					
Materials:						
Housing:	A360 Die-cast aluminium					
Finish:	Superior dual coat finish - Sealed polyester topcoat - Chemical-resistant epoxy primer					
Lens options:	Glass, Acrylic or Polycarbonate					
Hardware:	316 Stainless Steel					
Electrical Specifications:						
Operating voltage:	120-277 VAC, 50/60Hz 415 VAC, 50/60Hz					
Total system power consumption:	See table					
Operating temperature:	-40°C to +65°C					
Harmonics:	IEC 61000-3-2 Class C					
Surge protection:	Tested to IEC 61000-4-5 6kV/3kA, 1.2/50, 8/20us Combination wave Line-line and line-ground					
THD:	< 20%					
Power factor:	> 0.9					
Photometric Information:						
CRI:	80					
CCT:	5000K (cool white) 4000K (neutral white)					
All values typical unless otherwise stated (tolerance +/- 10%)						

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

#### www.dialight.com



### **Ordering Information**

### Vigilant® LED High Output High Bay - Low Profile - Standard Models




Part Number	Fixture Lumen	Watt	lm/W	IP Rating	Voltage CCT		Lens	Beam Distribution
H7E-7MC2-RDHN-NGN	70,500	485	145	IP66/67	120-277 VAC	5000K (cool white)	Glass	Medium
H7E-7NC2-RDHN-NGN	70,500	485	145	IP66/67	120-277 VAC	5000K (cool white) Glass		Narrow
H7E-7MC2-NDHN-NGN	61,200	418	146	IP66/67	120-277 VAC	5000K (cool white)	Glass	Medium
H7E-7NC2-NDHN-NGN	61,200	418	146	IP66/67	120-277 VAC	5000K (cool white)	Glass	Narrow
H7E-7MC2-KDHN-NGN	46,000	300	153	IP66/67	120-277 VAC	5000K (cool white)	Glass	Medium
H7E-7NC2-KDHN-NGN	46,000	300	153	IP66/67	120-277 VAC	5000K (cool white)	Glass	Narrow

All values typical unless otherwise stated (tolerance +/- 10%).


Neutral white color temperature (4000K) is available for products in the above table. Replace the sixth character <u>C</u> with <u>N</u>. Ex. H7E-7MC2-RDHN-NGN becomes H7E-7MC2-RDHN-NGN.

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

# **Beam Distribution**

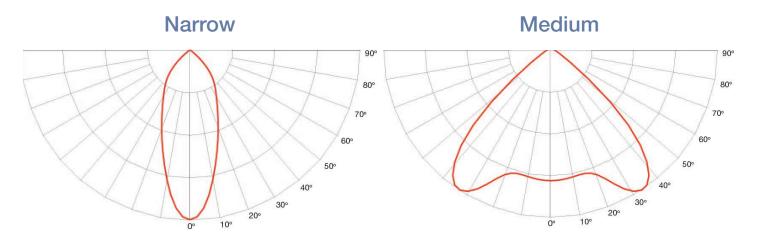


# **Thermal Roll-Off**

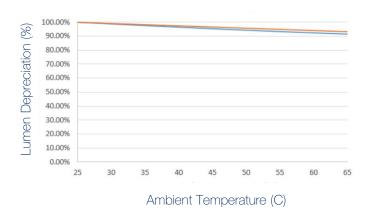

Thermal Rolloff (277V)



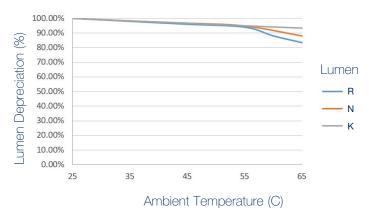

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

#### www.dialight.com



### In Rush Current / Circuit Breakers

In rush current @ input voltage			Time duration of in rush current @ input voltage				
120 VAC	277 VAC	347 VAC	480 VAC	120 VAC	277 VAC	347 VAC	480 VAC
15A	36A	8A	11A	1.5 ms	1.5 ms	.88 ms	.88 ms

Maximum number of lights per breaker								
	120 VAC				277 VAC			
Model	C10	B16	C16		C10	B16	C16	
К	3	4	4		5	8	8	
N	2	3	3		4	6	6	
R	2	2	2		3	5	5	
	347 VAC					480 VAC		
Model	C10	B16	C16		C10	B16	C16	
К	7	12	12		9	15	15	
N	5	8	8		7	11	11	
R	5	7	7		6	9	9	

## **Mounting Accessories**



#### H6XCAB72

- 72" stainless steel safety rope
- Kit includes: (1) cable
- Two (2) cables required for each fixture

#### H6XCAB60


- 60" stainless steel safety rope
- Kit includes: (1) cable
- Two (2) cables required for each fixture



#### H6XDIFFUSER

DiffuserDetect paneling





Dimensions in inches [mm]

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

#### www.dialight.com

### **Dialight Europe Ltd**

Leaf C, Level 36, Tower 42 25 Old Broad Street London, EC2N 1HQ, United Kingdom Tel: +44 (0) 203 058 3540 Customer Service: +44 (0) 163 866 6541 sales-emea@dialight.com

WARNING / DISCLAIMERS:

Arking / Discultations / Discultations / Arking / Discultation / Discultation