



The **Protecta III LED Geartray** is a unique solution to upgrade and utilise the very latest LED technology in existing Protecta III fluorescents.

Complete with LED strips and electronic driver, the geartray can be easily retro-fitted into the Protecta III GRP enclosure in a matter of minutes.

The robust enclosure is not compromised as it remains unchanged and all existing cabling and glanding can remain in place offering significant installation cost savings when upgrading to LED.

Standard Specification

Protecta Ex e LED Linear Fluorescent Replacement

Type of Protection*	Ex e mb q (Increased Safety Encapsulation, Powder filling)
ATEX Classification*	Group II Category 2 GD
Area Classification*	Zone 1 and 21 areas to EN 60079-10-1 and EN 60079-10-2 with installation to EN 60079-14
Certificate*	EC Type Examination Certificate Baseefa04ATEX0220 IECEx Certificate of Conformity IECEx BAS09.0017
Coding*	Ex e mb q IIC T4 Gb Ex tb IIC T95°C Db IP6X
Geartray	Aluminium
Installation	Fix to existing GRP body - refer to IOM
Control Gear	Electronic Driver
Colour Temperature (CCT)	6000K (Cool Daylight)
Maintenance	Components accessible on geartray
Battery	Internal Ni-Cd (6V) (Emergency only)
Emergency Duration	90 mins (30% output)
Ingress Protection*	IP66/67 to EN 60529
Surge Protection	4kV
Electrical Supply	220-254V AC, 50/60Hz

* Only applicable once installed in Protecta III GRP enclosure

International Approvals



LED SOLUTIONS

For Harsh & Hazardous Locations



Features

- ◆ Highly **Energy Efficient**
- ◆ **120,000** maintenance free hours @ 25°C (L70)
- ◆ **Simple upgrade** of existing fluorescents

Product design and specifications are subject to change without notice. Please check the Chalmers website for latest specifications.
www.chalmers.com




MADE IN
BRITAIN

Std. Cat No.	Delivered Output	Power Consumption	Ambient °C	Weight
PRRE/02L/LE	2178 lm	30W	-40 to +55	5.0kg
PRRE/05L/LE	4607 lm	60W	-40 to +55	6.0kg
PRRE/02L/LE/EM	2178 lm	32W	-25 to +55	6.0kg
PRRE/05L/LE/EM	4607 lm	64W	-25 to +55	7.5kg


Options - Suffix to Catalogue No.

/120	Specific voltage (110-130V)	/4K	4000K (Neutral White) LED Strips
/3H	3 hour battery duration (15% output)	/LT	Low temperature version (Emergency ambient becomes -40°C to +55°C)**
		/LTT	Low temperature version with battery temperature regulator (Emergency ambient becomes -40°C to +45°C)

** /LT is optional on standard model to minimise ice build-up.

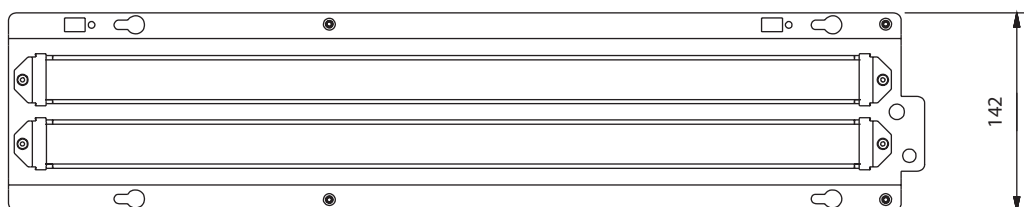

DIM	02L	05L
A	657	1261

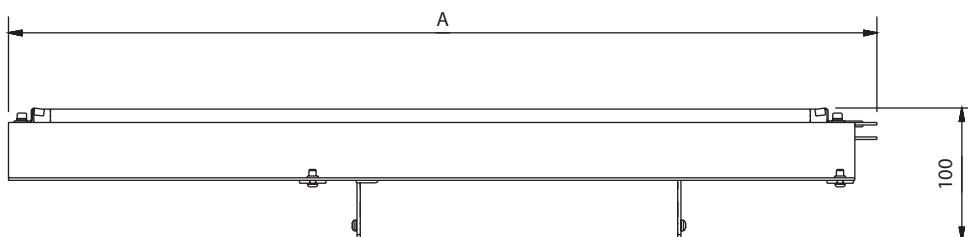

Chalmers

**LED
SOLUTIONS**
— For Harsh & Hazardous Locations —



Harsh & Hazardous

Chalmers PO BOX 5575 Glasgow G52 9AP
Tel: +44(0) 141 882 5555 Fax: +44(0) 141 883 3704 Email: info@chalmers.com
www.chalmers.com