


Group I Cable Glands - Mining

Flameproof, Increased Safety
Certified ATEX / IECEx

Application

- Mining.
- For use with single wire armour 'W', wire braid 'X', steel tape armour 'Z', elastomer and plastic insulated cables.
- For particular use with:-
- Cables that exhibit 'Cold Flow' characteristics.
- See technical section for installation rules and regulations.

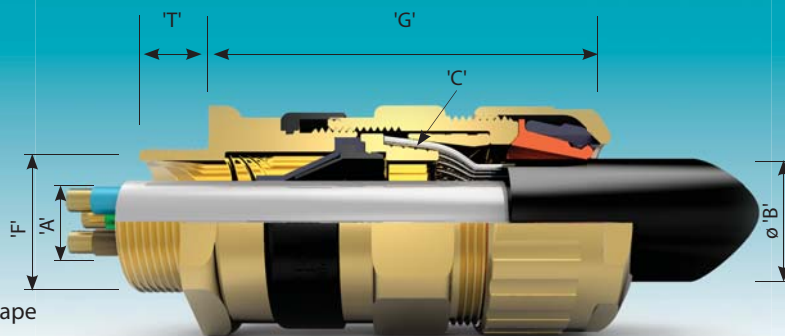

CABLE GLAND SELECTION TABLE

Size Ref.	Entry Thread Size		Cable Acceptance Details						'G'	Hexagon Dimensions	
	Metric	NPT * Standard or Option	Inner Sheath 'A'		Outer Sheath 'B'		Armour / Braid 'C'			Across Flats	Across Corners
			Min.	Max.	Min.	Max.	Orientation 1	Orientation 2			
Os	M20	½"	3.5	8.1	5.5	12.0	0.8 / 1.25	0.0 / 0.8	61.6	24.0	26.5
O	M20	½"	6.5	11.4	9.5	16.0	0.8 / 1.25	0.0 / 0.8	61.6	24.0	26.5
A	M20	¾" or ½"	8.4	14.3	12.5	20.5	0.8 / 1.25	0.0 / 0.8	63.0	30.0	32.5
B	M25	1" or ¾"	11.1	19.7	16.9	26.0	1.25 / 1.6	0.0 / 0.7	69.9	36.0	39.5
C	M32	1¼" or 1"	17.6	26.5	22.0	33.0	1.6 / 2.0	0.0 / 0.7	73.2	46.0	50.5
C2	M40	1½" or 1¼"	23.1	32.5	28.0	41.0	1.6 / 2.0	0.0 / 0.7	77.9	55.0	60.6
D	M50	2" or 1½"	28.9	44.4 / 42.3 ¹	36.0	52.6	1.8 / 2.5	0.0 / 1.0	93.5	65.0	70.8
E	M63	2½" or 2"	39.9	56.3 / 54.3 ¹	46.0	65.3	1.8 / 2.5	0.0 / 1.0	94.0	80.0	88.0
F	M75	3" or 2½"	50.5	68.2 / 65.3 ¹	57.0	78.0	1.8 / 2.5	0.0 / 1.0	101.0	95.0	104.0

All dimensions in millimetres (except * where dimensions are in inches). Metric entry threads are 1.5mm pitch as standard.

¹ Smaller value is applicable when selecting reduced NPT entry option.

Technical Data

- Flameproof Exdb and Increased Safety Exeb I M2.
- Certificate No's: Baseefa08ATEX0330X and IECEx BAS 08.0114X.
- Suitable for use in Mines.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1 and IEC/EN 60079-7.
- Ingress Protection: IP66, IP67 and IP 68* (30 metres for 7 days) to IEC/EN 60529.
- Operating Temperature Range: -60°C to +80°C.
- Assembly Instruction Sheet: AI 371.

* Additional installation procedures required.

Features

- Provides armour clamping using one clamping arrangement for all armour / braid types.
- Provides a diaphragm seal on the cables inner sheath which will not damage cable that has 'Cold Flow' characteristics.
- Provides a cable retention and low smoke and fume, zero halogen seal onto the cables outer sheath.
- Manufactured in Brass (standard), Nickel Plated Brass or 316 Stainless Steel.
- Brass NPT entries are nickel plated as standard.

Alternative Reversible Armour Clamping Rings (RAC)

Size Ref.	SELECTION TABLE	
	Steel Wire Armour / Braid / Tape	
	Orientation 1	Orientation 2
B	0.9 - 1.25	0.5 - 0.9
C	1.2 - 1.6	0.6 - 1.2
C2	1.2 - 1.6	0.6 - 1.2
D	1.45 - 1.8	1.0 - 1.45
E	1.45 - 1.8	1.0 - 1.45
F	1.45 - 1.8	1.0 - 1.45

Ordering Information

Format for ordering is as follows:

Alternative Clamping Ring (AR), add suffix AR to ordering information.

Cable Gland Type	Size	Thread	Material	(Optional)
453/UNIV	C	M32	Brass	AR
453/UNIV	C	1 ¼" NPT	Brass	AR