

Sounder-Strobe-Combination AXL08

**Loud signalling device
with 42 different signals
and a 3.5 joule strobe light**

- ▶ AC and DC versions
- ▶ High volume up to 120 dB(A)
- ▶ Low current consumption
- ▶ Choice of 42 different signal tones
- ▶ Strobe light 3.5 Joule / 2 Joule
- ▶ Sturdy and reliable

Application

The combination consists of a loud, compact signalling device with good directivity and a 3.5/2.0 Joule strobe light. The optical and acoustic signals can be controlled separately of each other.

The IP 66 housing qualifies the device for use both indoors and outside.

Design

The housing consists of ABS. The sounders are equipped with 42 different tones and are therefore suitable for universal use.

The signal tone is selected with a DIP switch. All versions are designed for a three-stage alarm.

The strobe light is controlled via a separate connection terminal.


**Signalling device
with good
directivity and
a strobe light**

for use indoors and
outside.



Technical specifications

Housing	ABS
Colour	red
Cap	Polycarbonate
Protection degree	IP 66 (IEC 60529)
Cable gland	knockouts
Volume	approx. 105-120 dB(A) adjustable (depending on signal tone)
Flash energy	3.5 Joule / 2 Joule
Signals	42 different signal tones
Temperature range	-25 °C to +70 °C
Weight	approx. 1.8 kg / 2.5 kg

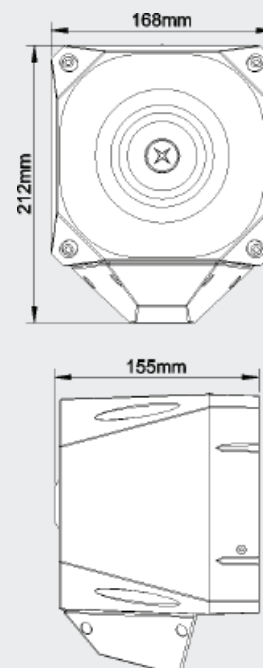

Order information

* The full article number is made up by appending the colour code for the coloured cap to the article numbers given below.

transp.	01
red	02
amber	03
blue	05

Type	Name	Rated voltage V	Flash Energy	Volume dB(A)	Art. no.*
AXL08	Sounder-Strobe-Combination	230 VAC	2 Joule	120	225 207 . .
AXL08	Sounder-Strobe-Combination	18 - 30 VDC	3.5 Joule	110	225 213 . .

Subject to change without notice · Printout 09/13