


Profiline



Xenon Strobe Light Profi Flash

Optical signalling device for inside and outside mounting

- ▶ Flash energy 5 Joule
- ▶ Continuous operation
- ▶ One version for wall mounting and standing inside and outside mounting
- ▶ Modular housing design
- ▶ Protection degree IP 54

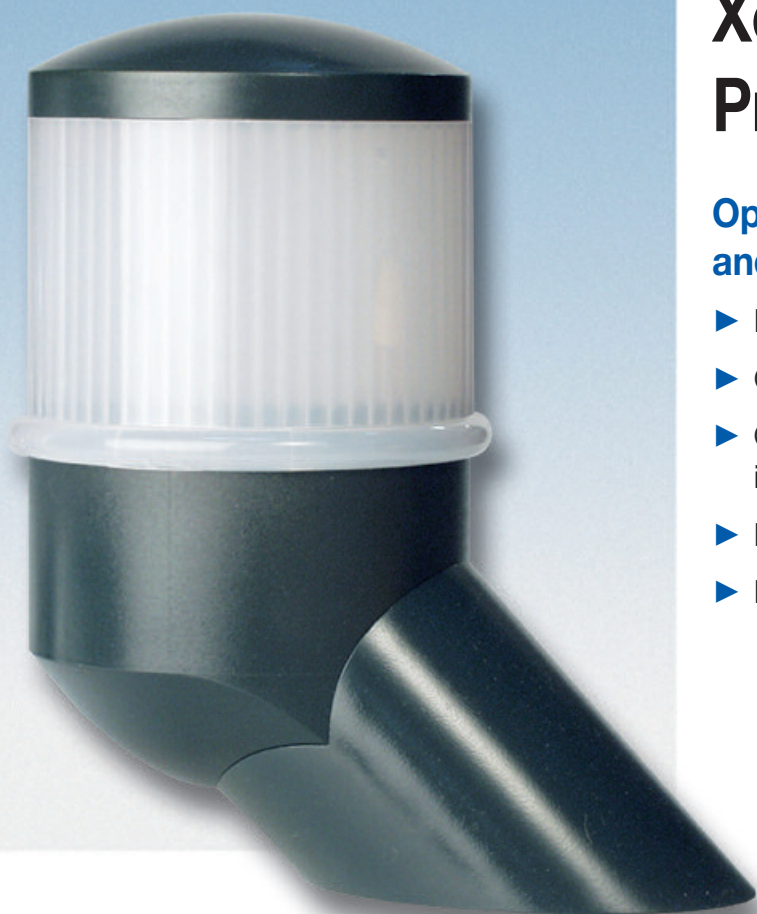

Application

With its modular, stylish housing the Xenon Strobe Light Profi Flash can be mounted on the wall or standing.

The strobe light is available with 6 different caps and 2 different standard housing colours.

By design, the device conforms to protection degree IP 54 and is suited for inside and outside use.

Design

The modular housing design enables a variety of solutions with regard to design and function.

All housing parts are made of impact-resistant ABS, and the cap consists of polycarbonate.

The flash frequency amounts to approx. 60 flashes per minute (1 Hz).

In addition to the standard housing colours, optional colours may be available, depending on the number of devices ordered.


Alarm in modern Buildings

The strobe light is available with 6 different caps and 2 different standard housing colours.



Technical specifications

| | |
|----------------------|--|
| Housing | ABS |
| Colour | white or grey (other colours on request) |
| Cap | Polycarbonate |
| Signalling colours | yellow, amber, transparent, red, green, blue |
| Protection degree | IP 54 |
| Protection class | II |
| Cable gland | Male thread bush M16 x 1.5 for cable diameters from 6 to 8 mm |
| Connecting terminals | Clamping capacity 1.5 mm ² fine-wired |
| Operating conditions | Inside or outside |
| Operating position | Any |
| Operating mode | Continuous operation |
| Flash energy | 5 Joule |
| Temperature range | |
| Operating | -20 °C to +40 °C |
| Storage | -30 °C to +80 °C |
| Weight | Approx. 0.36 kg |

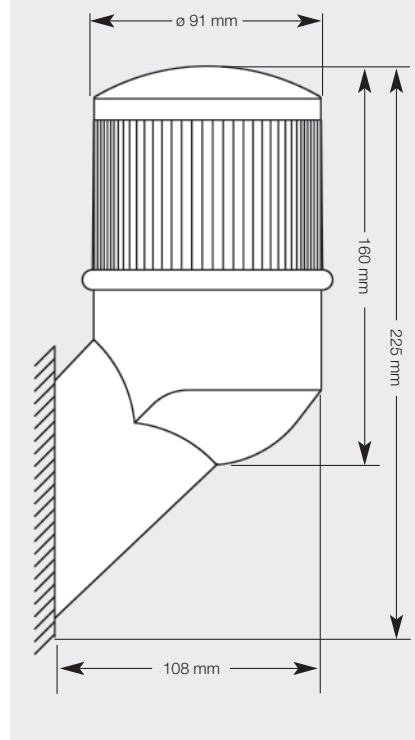

Order information

| | | |
|--|-------------|---|
| * The full article number is made up by appending the colour code for the coloured cap to the article numbers given below. | transparent | 1 |
| | red | 2 |
| | yellow | 3 |
| | green | 4 |
| | blue | 5 |
| | amber | 6 |

| Type | Name | Rated voltage U _e | Tolerance U _e | Current consumption | Art. no. |
|-------------|--------------------|------------------------------|--------------------------|---------------------|--------------|
| Profi Flash | Xenon Strobe grey | 230 VAC | + - 10 % | 0.2 A | 415 201 11 . |
| Profi Flash | Xenon Strobe white | 230 VAC | + - 10 % | 0.2 A | 415 202 22 . |
| Profi Flash | Xenon Strobe grey | 24 VDC | + - 15 % | 0.3 A | 415 101 11 . |
| Profi Flash | Xenon Strobe white | 24 VDC | + - 15 % | 0.3 A | 415 102 22 . |

Subject to change without notice · Printout 01/11